



Tire Pressure Monitoring System Rear Antenna (86.53.17)

Removal

- 1 . Raise and support the vehicle.
- 2 . Remove the fender splash shield.
 - ▶ Remove the 9 screws.
 - ▶ Disconnect the electrical connector.

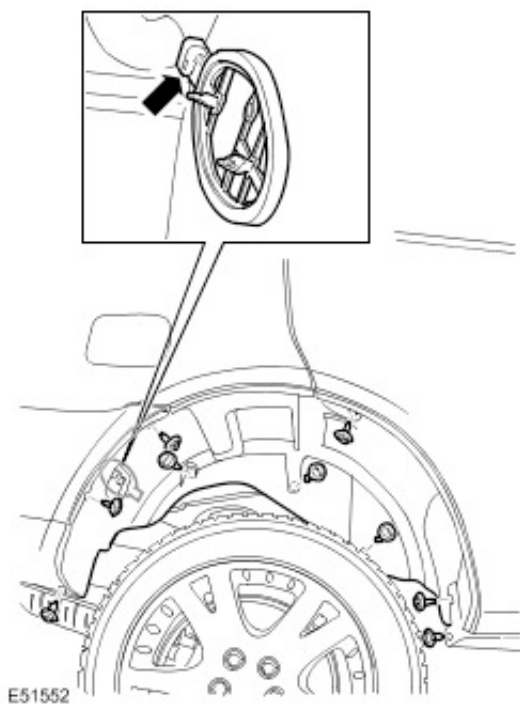

- 3 . Remove the tire pressure antenna.
 - ▶ Remove the 2 retainers.

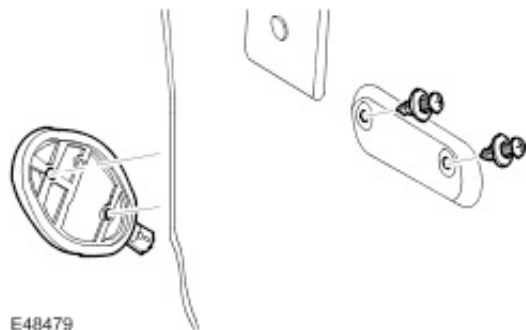

Installation

- 1 . To install, reverse the removal procedure.
- 2 . Initiate a new tire pressure antenna using T4.