


1.12 Door Trim Removal

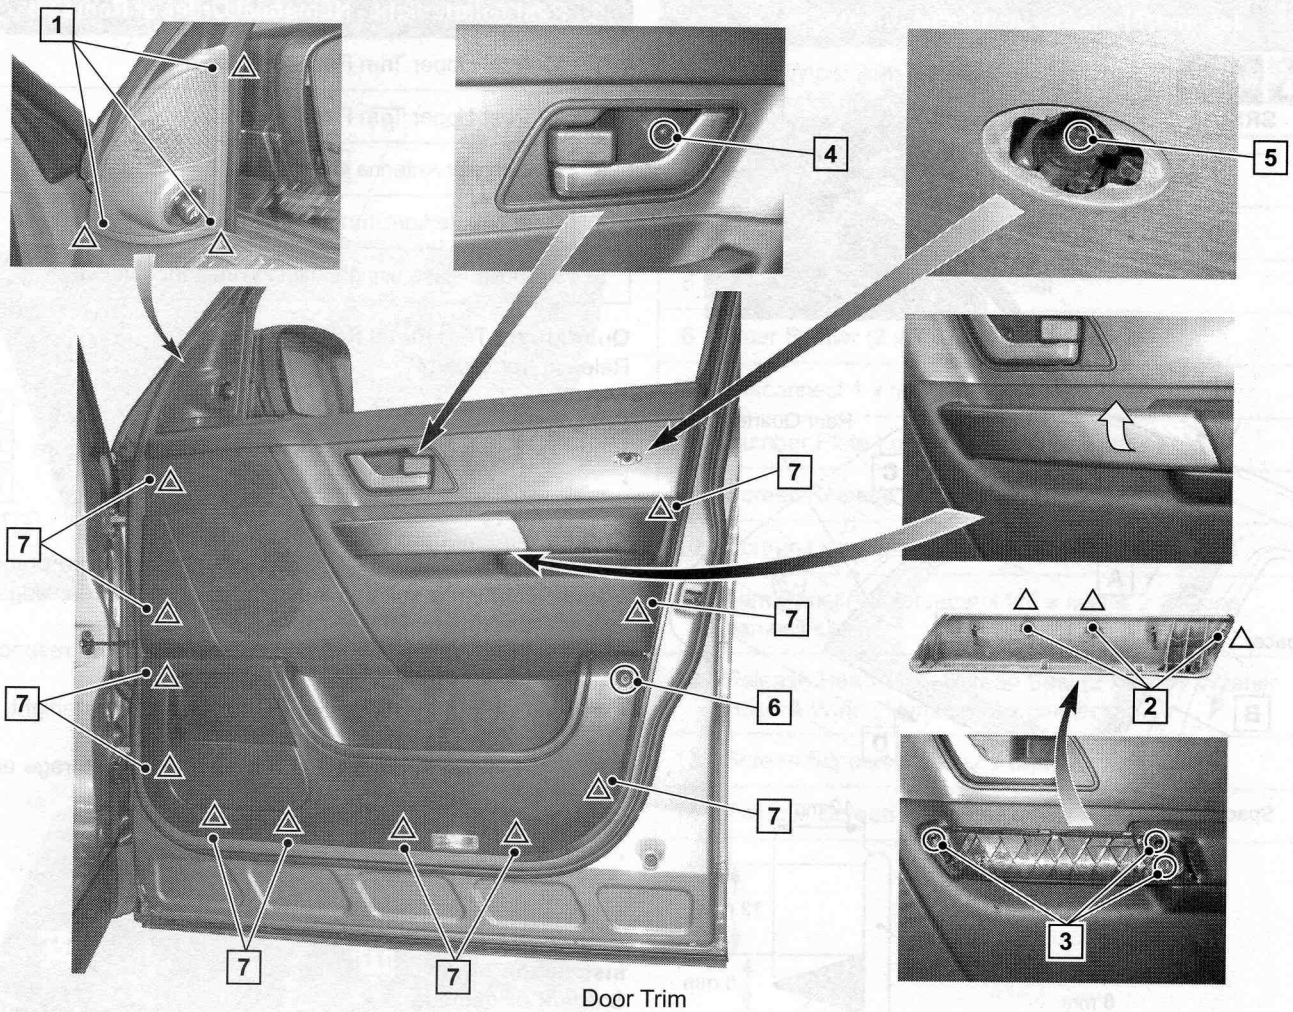

Door Trim

To Remove: (Refit in reverse order)

Door Trim Front - Numerical Order of Removal	
1	Unclip 3 x clips to release door mirror triangle cheater plate and disconnect 2 x electrical connectors
2	Unclip 3 x clips from the lower edge and remove pull handle cover
3	Remove 3 x screws from pull handle
4	Remove blank from door release handle bezel to access and remove screw
5	Remove badge to access and remove screw
6	Remove 1 x screw from trimboard
7	Disengage 11 clips to release trimboard
8	Disconnect door latch remote release cable
9	Carefully pull trimboard outwards from lower edge, disconnect 5 electrical connectors and lift off waist rail to remove
10	Stow in safe storage area

To Remove: (Refit in reverse order) - Information Only

Door Trim Rear - Numerical Order of Removal	
1	Unclip 3 x clips from the lower edge and remove pull handle cover
2	Remove 3 x screws from pull handle
3	Remove blank from door release handle bezel to access and remove screw
4	Disengage 8 clips to release trimboard
5	Disconnect door latch remote release cable
6	Carefully pull trimboard outwards from lower edge, disconnect 3 electrical connectors and lift off waist rail to remove
7	Stow in safe storage area